
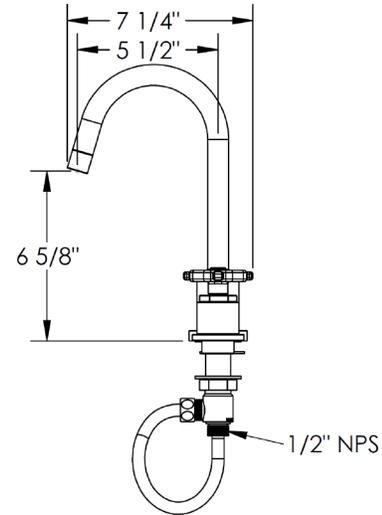


FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

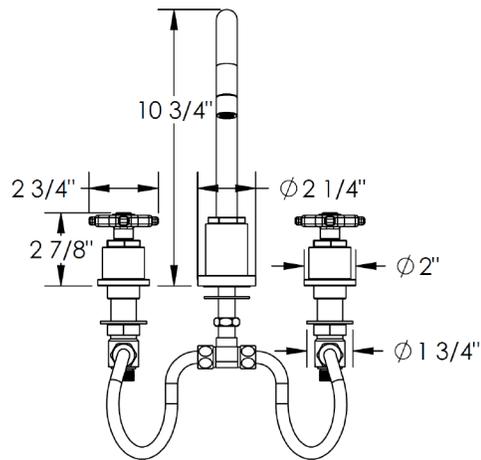

ITEM NO.	PART NUMBER	QTY.
5	27-2-SPT	1
6	27-2-AERTR-SHLL	1
7	NEOPERL PCA PL TT	1
9	AERTR-GSKT	1
10	142-LOCK-NUT	1
12	142-TEE-GSKT	1
13	142-TEE	1
14	142-HRS-SHOE-WSHR	1
15	142-LOCK-NUT	2
16H/16C	SS-502 VALVE BODY	2
17H/17C	SS-502-CARTRIDGE	2
18	L4-TOP-LOCK-NUT	2
20	502-FLEX-HOSE	1
21	22-2-SPT-BASE-GSKT	1

HANDLE TRIM

CODE: TL6



ITEM NO.	PART NUMBER	QTY.
1	CL14-ESC-RING	1
2	CR-FHMS 0.164-32x0.5x0.5-S	1
3	AS568 - 023	1
4	AS568 - 012	1
5	TL6-ESC-NUT	1
6	TL6-CRSS-HNDL	1
7	TL6-CRSS-HNDL-CAP	1
8	CL14SM-ESC	1

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 888-401-1900