

## Pittock single brass sconce

### **CAUTION:**

- **BEFORE INSTALLING FIXTURE, MAKE SURE THE POWER TO THE CIRCUIT IS TURNED OFF AT THE MAIN FUSE BOX / CIRCUIT BREAKER UTILITY BOX.**

### **IMPORTANT SAFETY INSTRUCTIONS:**

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of this lighting fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.
- THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- The lighting fixture is meant for indoor or outdoor use. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- For your safety, it is strongly recommended that two people install the lighting fixture.
- Light bulbs should be centered inside the sconce shade. Making sure they do not touch the shade sides.
- This fixture has been rated for up to one (1) **40-watt maximum TYPE A standard incandescent light bulb** (not included) or one (1) **9-watt compact fluorescent light bulb** (not included) or one (1) **5-watt SBLED light bulb** (not included). To avoid the risk of fire, do not exceed the recommended lamp wattage.
- The lighting fixture is meant for indoor or outdoor use, SUITABLE FOR EITHER DRY, DAMP OR WET LOCATIONS
- **Please save these instructions.**

### **WARNING:**

- **To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior to replacing light bulb.**
- **Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- **Keep flammable materials away from lit bulb.**
- **This lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture.**

## **PRE-ASSEMBLY:**

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended.


### **Parts Included:**

- (1) Mounting Plate (B)
- (1) Glass Cover (J)
- (1) Lamp body (G)
- (1) bulb (I)
- (1) Green Ground Screw (C)
- (2) Canopy Screws 5/32\*12MM (E)
- (3) T screw (F)
- (1) Socket(H)

### **Hardware Enclosed:**

- (3) Plastic Wire Nut Connectors (A)
- (2) Mounting Screws 5/32\*80MM (D)

Please purchase bulb and glass cover separately.

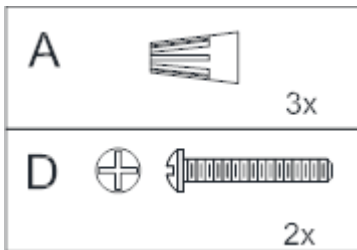

**Tools Required: (not included):** Step Ladder, Phillips Head & Flat Blade Screwdrivers, Wire Cutter/Stripper & Electrical Tape.

Outdoor Silicone Caulking Compound


## **ASSEMBLY & INSTALLATION INSTRUCTIONS:**


1. **SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!**
2. Carefully unpack all fixture parts and hardware and lay them out on a clear workspace.
3. If needed, separate Mounting Plate (B) from Canopy by removing the two Canopy Screws (E). Do not discard Canopy Screws (E) as these will be used later.
4. Gently pull existing wire out from the wall junction box and allow wires to hang. The HOT or LIVE wire is usually black. The NEUTRAL wire is usually white. Check to see if there is a ground wire that is usually green or green with a yellow stripe or exposed copper metal wire. If needed, use a pair of wire strippers to remove about 1/2 inch of insulation from each wire.

5. Carefully inspect the fixture wires. The NEUTRAL FIXTURE WIRE is White. The HOT FIXTURE WIRE is Black. The GROUND WIRE is Green with a Yellow Stripe. If you have any doubt and cannot identify the power-supply wires with confidence, then we recommend that you ask an electrician and that you not continue with the installation.
6. Insert the fixture wires through the center opening of the Mounting Plate (B).
7. With the help of another person to hold the weight of the light fixture, attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet junction box (J-box) (usually green insulation or bare wire). Fasten each together with a Plastic Wire Nut Connector (A) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet junction box DOES NOT have a GROUND WIRE, be sure to insert the Green Ground Screw (C) into the Mounting Plate (B), marked as "GND", facing outward and wrap the fixture's bare ground wire around the Green Ground Screw (C). Tighten screw to clamp ground wire between ground screw head and Mounting Plate (B). **IT IS IMPERATIVE THAT THE JUNCTION BOX IN YOUR HOME BE PROPERLY GROUNDED!**
8. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white insulation). Fasten each together with a Plastic Wire Nut Connector (A) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
9. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black insulation). Fasten each together with a Plastic Wire Nut Connector (A) by twisting the connector in a clockwise direction and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
10. Check the wiring connections and if all looks good, gently tuck the wire connections neatly into the junction box.
11. Attach the Mounting Plate (B) to the wall outlet box using the two J-box Mounting Screws (D). Align the slots of the Mounting Plate (B) with the two threaded holes located on the J-Box. Use a screwdriver to tighten each screw with a screwdriver until the Mounting Plate (B) is firmly secured to the J-Box
12. Position the Canopy over the Mounting Plate (B) aligning the two holes on Canopy with the two threaded holes on the Mounting Plate (B). Insert the two Canopy Screws (E) and tighten each with a screwdriver until secure.
13. Insert one (1) **40-watt maximum TYPE A standard incandescent light bulbs** (not included) or one (1) **9-watt compact fluorescent light bulbs** (not included) or one (1) **5-watt SBLED light bulb** (not included) into Sockets (H). **DO NOT EXCEED THE SPECIFIED WATTAGE.**
14. Attach the two Glass Covers (J) onto both ends of the Lamp Body (G) and twist the screw(F). (See diagram)
15. To prevent the water from entering the J-box and causing a short circuit, use the outdoor silicone caulking compound to caulk completely along the rim of Canopy (H) where it meets the wall surface, but leaving a space without the caulking compound at the bottom of Canopy to allow the water to seep out if the water entered into the J-box by accident. (See Fig.1)  
  
NOTE: Mounting surface should be clean, dry, flat, and a 1/4 inch larger than the Canopy on all sides.
16. Restore power to junction box and test fixture.
17. Assembly and installation is complete.

#### **CARE INSTRUCTIONS:**

- Wipe clean with a soft, dry cloth or static duster.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the fixture's finish.

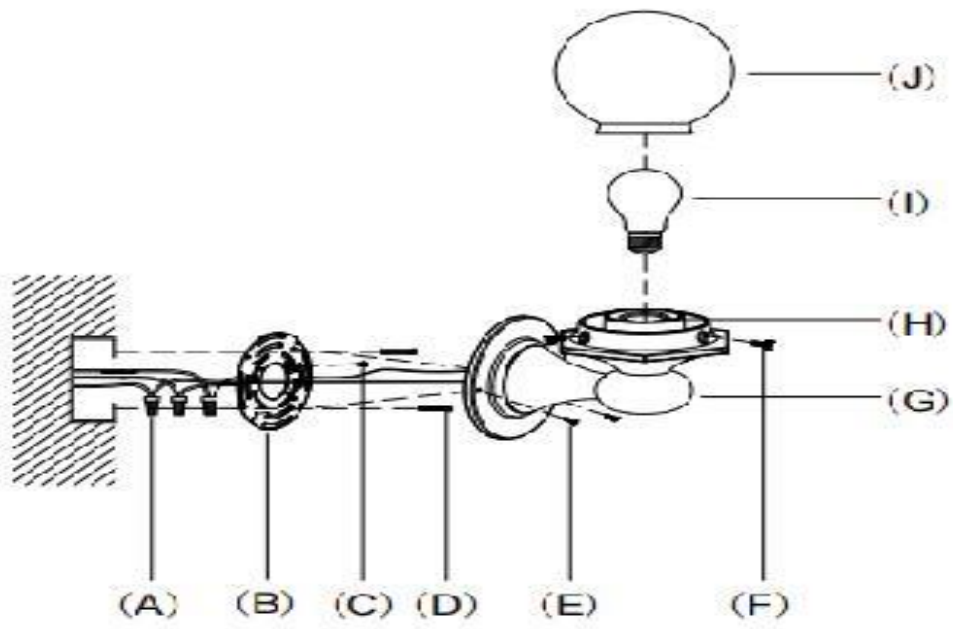

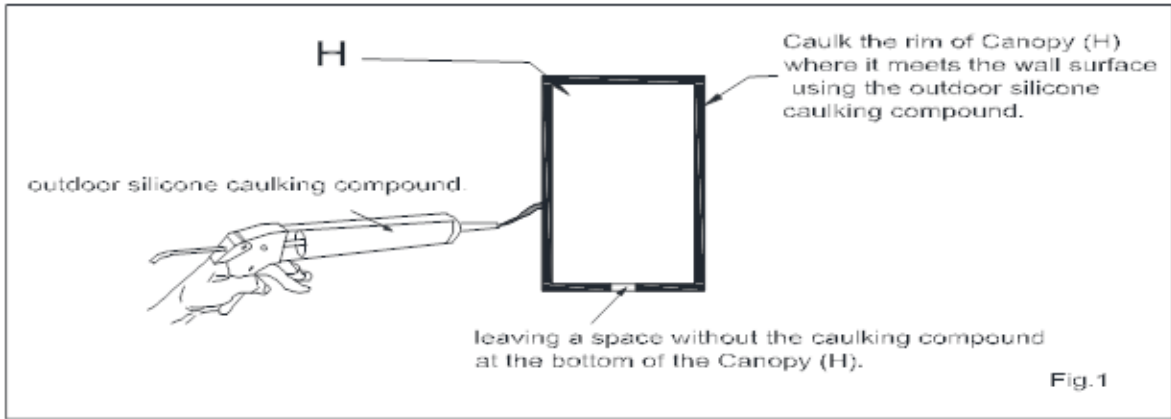

**Thank you for your purchase**

2550 N.W. Nicolai Street, Portland Oregon 97210 Customer Service: 888 401-1900 rejuvenation.com