


# Oswego Ceiling Fixtures

skill level


• basic electrician

## installation instructions










• toolbox



1. Loosen bushing then slide canopy and bushing down tube.  
\* Proceed carefully during installation to avoid scratching tube.
2. Attach the crossbar to the electrical box.
3. The fixture comes assembled to fit most installations.  
Check fit by pulling canopy up tube and holding canopy against ceiling.  
About 1/4" of threads on the hang-straight need to be exposed.  
If not, remove fixture from electrical box and adjust position of crossbar on nipple, then reattach to electrical box.

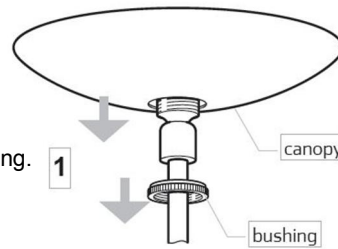

4. Tighten the jamb nut against the crossbar to lock the assembly into position.
5. Make wiring connection according to local electrical codes
6. Slide Canopy up against the ceiling and secure with bushing.
7. To install the shade, unscrew collar and slide collar and cap up the tube.
8. Guide the shade over the bulb and socket
9. Tilt the shade sharply and guide it up over one side of the shade holder.
10. Rotate the shade back to center and lower onto the shade holder.
11. Center the support plate so that is nesed inside the shade opening.
12. Slide the cap and collar down the tube and tighten the collar very firmly by hand.

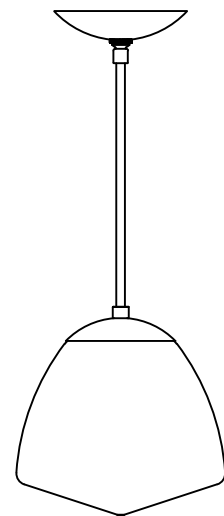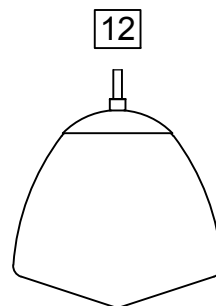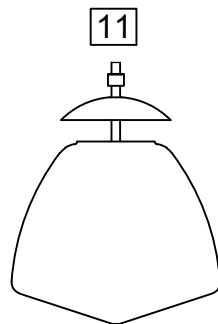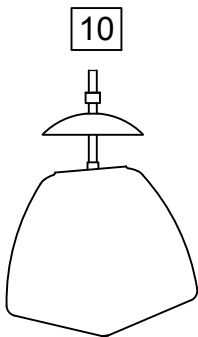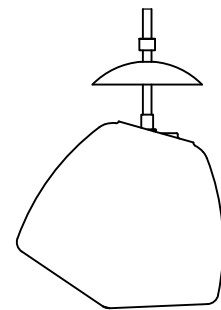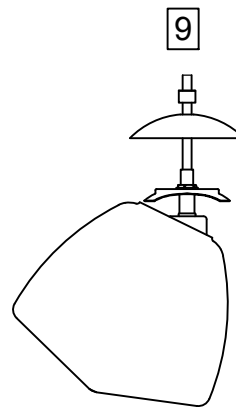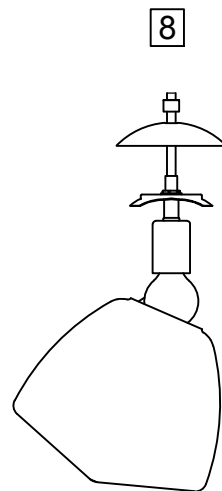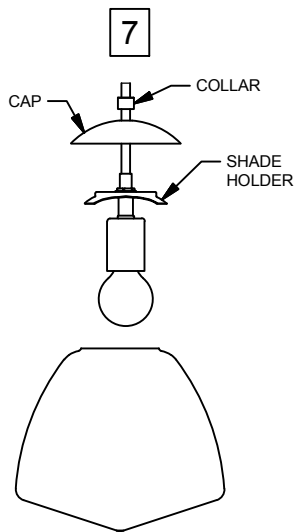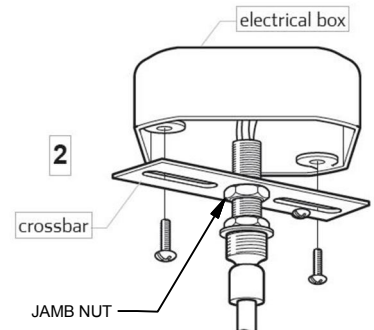

# REJUVENATION