


Information on Electric Door Bell Chimes

- These chimes require a 16 volt transformer (included) for their operation. If you are planning to use an installed transformer, please be sure that the voltage is compatible.
- The chimes are capable of being operated by two separate buttons - please see the wiring diagram for the correct installation.
- If you are installing these chimes "from scratch" you will need to purchase separately bell wire for your installation. 18 gauge is sufficient, and be sure to buy enough - all the wires between the various components should be splice free.
- The connections between the transformer and the 120 volt house wiring must be made inside a junction box. The transformer itself is made to mount in a knock-out. The transformer cannot be buried in an inaccessible place (a wall, for example). The preferred location is probably in the basement, as centrally located between the button and the chime as possible.

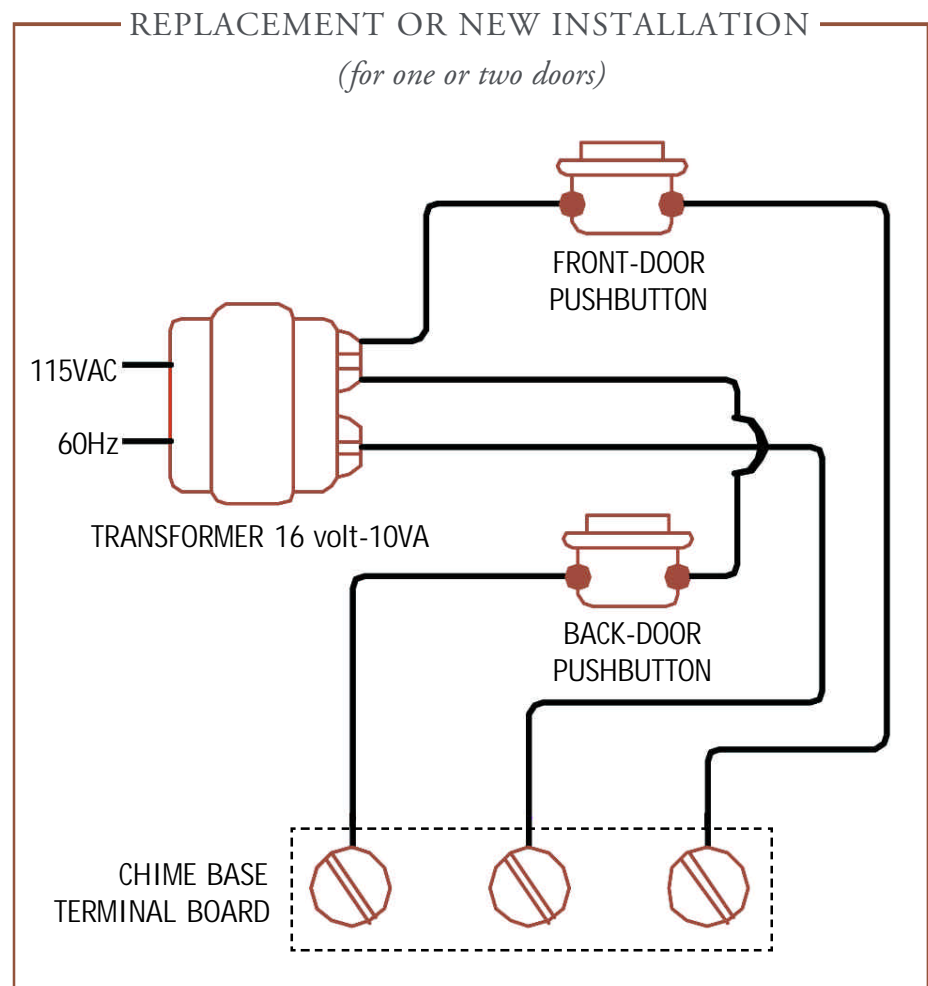

REJUVENATION®