

Beckett Leather Pull Instructions


skill level • Easy

installation instructions

PARTS INCLUDED

Leather Drawer Pull	1 pc per mounting hole
Brass Binding Post	1 pc per mounting hole
Brass Spacer	1 pc per mounting hole
8-32 3/8" Truss Head Screw	1 pc per mounting hole
8-32 1" Truss Head Screw	1 pc per mounting hole


• toolbox




INSTALLING INSTRUCTIONS

Note: This pull includes hardware that is designed to mount securely to drawer-fronts or cabinet doors that have a thickness range between 1/2 inch and 1-1/2 inches. If your drawer-front or door is thicker or thinner than this range, please obtain the appropriate size screw from your local hardware store.

1. Carefully determine a desired Pull location. Use a 1/4 inch diameter drill bit and an appropriate drill to make the holes through the drawer-front / door with the proper center to center distance matching your pulls, 4", 6" or 8".
2. Insert the appropriate length screws from the back of the drawer-front / door.
3. Attach the drawer pull onto the protruding threads of the screws. Use a screwdriver to tighten the screws while gently holding the drawer pull.

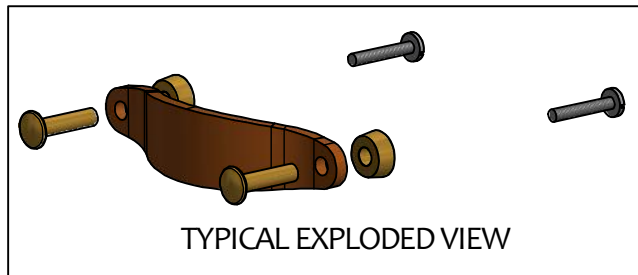

TYPICAL EXPLODED VIEW

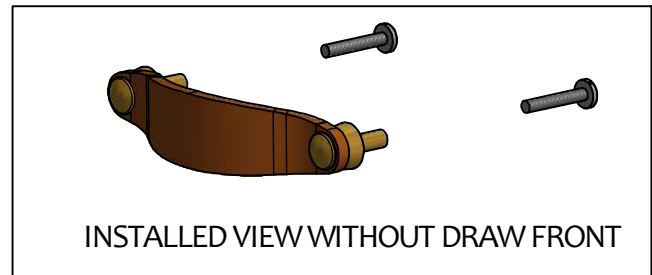

INSTALLED VIEW WITHOUT DRAW FRONT

CARE INSTRUCTIONS

Wipe with a soft, dry cloth. To protect the finish, do not use household cleaners or abrasives.

CALIFORNIA PROPOSITION 65 WARNING: This product contains brass hardware components which contain lead, a heavy metal known by the State of California to cause cancer, birth defects, or other reproductive harm.

REJUVENATION