


FEATURES

- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

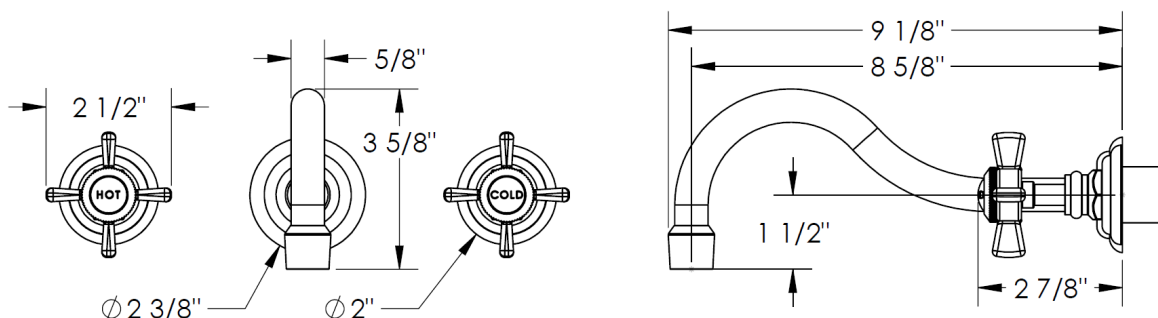

ITEM NO.	PART NUMBER	QTY.
1	206-2.2-BASE	1
2	206-2.2 SPOUT	1
3	206-2-AERTR-SHLL	1
6	206-2.2-NPPL-ADAP	1
7	NEOPERL FLOW REGULATOR	1
8	S1-ESC	2
9	S1-ESC-NUT	2
10	S1-STEM	2
11	CR-PHMS 0.164-32x1x1-S	2
12	X-CAP-RING	2
13	X-PRCLN-INSRT-HOT/COLD	1
14	AS568 - 014	2
15	S1-CRSS-HNDL	2
16	CO5-CAP-ADAP	2
18	SS-TS150 BODY	1
19	SS-TS150-NPPL	1
20	SS-TS150-PKNG-NUT	1
21	CRT508-TS	1
22	AERTR-GASKET	1

IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 888-401-1900

