
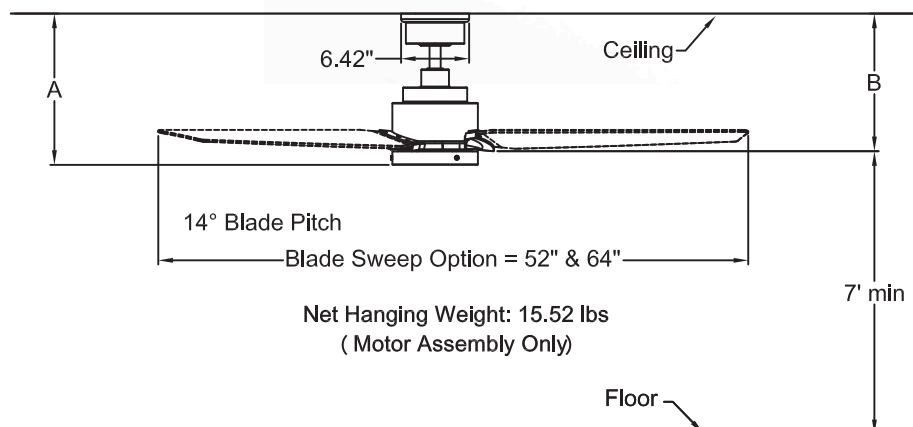


PETREL™

MAD7602** Ceiling Fan

REJUVENATION
LIGHTING & HOUSE PARTS

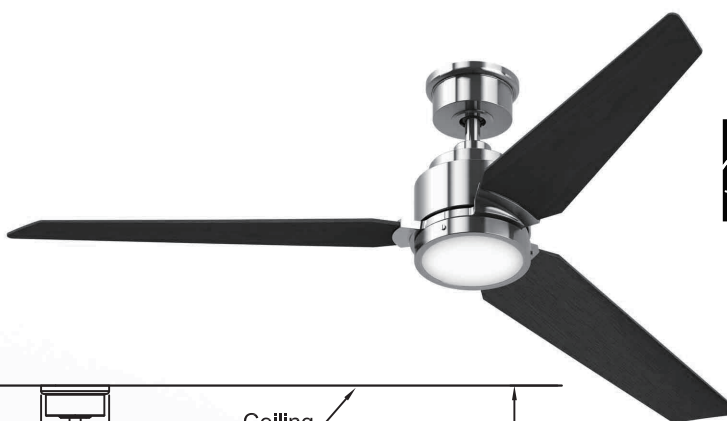

Available Finishes	
Fan / Housing Assembly	
BL	Black
BN	Brushed Nickel

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of three 22" and 28" plastic blades—sold separately

	A	B
Fan w/4.5" downrod	13.65"	12.37"
Fan w/12" downrod	21.15"	19.87"
Fan w/18" downrod	27.15"	25.87"
Fan w/24" downrod	33.15"	31.87"
Fan w/36" downrod	45.15"	43.87"
Fan w/48" downrod	57.15"	55.87"
Fan w/60" downrod	69.15"	67.87"
Fan w/72" downrod	81.15"	79.87"

CONTROL OPTIONS:

TR205DRJ hand-held remote control is included. Push button remote control with variable fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt dimmable LED.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped hanger ball (APG245BL) is available for slope angles greater than 19° and up to 32°—included. Optional close-to-ceiling kit is available as well—included. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

