

Track Lighting Installation Instructions

skill level • basic electrician



installation instructions

Install the Track and J-Box adapter:

-Following Nora Lighting Installation Instructions provided with track components.

Available online at this URL: https://noralighting.com/wp-content/uploads/2018/11/nt_connectors_inst.pdf

• toolbox

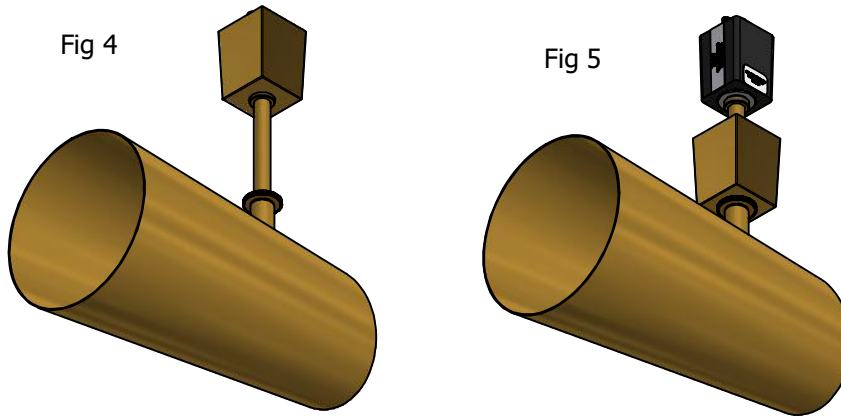




Install Instructions:

Note: LED Track Head comes ready to install out of box.

1. Turn off power to track before beginning installation.
2. Insert the fixture contacts into the track channel. (Fig 2)
3. Loosen track adapter cover knurled locknut and carefully lower down tube.
4. Carefully lower track adapter cover down tube exposing track adapter.
5. Turn the fixture clockwise until the contact head can be inserted into the track.
6. Push fixture straight into track, rotate contact head adapter clockwise until it locks into place. (Fig 3)
7. The polarity lines on both track and fixture are aligned.
8. To aim, rotate fixture horizontally from mounting adapter and vertically from head.

Removal Instructions:

1. To remove track head, pull mounting adapter sleeve down and turn counter clockwise 90°

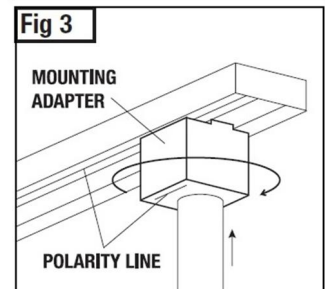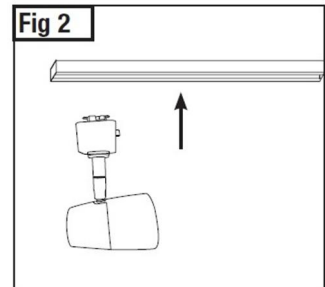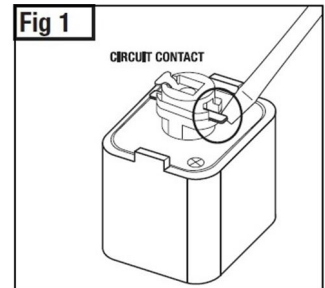

IMPORTANT SAFETY INSTRUCTIONS

When installing or using this track system, basic safety precautions should always be followed, including the following:

- a) Read all instructions.
- b) Do not install this track in damp or wet locations.
- c) Do not install any luminaire assembly closer than 6 inches from any curtain, or similar combustible material.
- d) Do not install any part of the track system less than 5 feet above the floor
- e) Disconnect electrical power before adding to or changing the configuration of the track.
- f) Do not attempt to energize anything other than lighting track luminaires on the track. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.

Proper method of mechanically securing and electrically connecting each electrical fitting to the track or to another electrical fitting shall be clearly described.

SAVE THESE INSTRUCTIONS

REJUVENATION